

# INSTALLATION INSTRUCTIONS FOR FIXTURE

**#3000MP-SG.#3000-3B-SG.**

**#3000MP-OS.#3000-3B-OS.**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling including the mounting hardware.
2. Carefully remove the new fixture from the packaging and check that all parts are included as shown in the illustration.
3. Determine the desired hanging height and thread tubes (H) to the nipple (I) on the fixture body. Pass the wires carefully through each tube as you assemble.
4. Carefully unpack fixture and all components.
5. Carefully pull wires through the stems and couplings into canopy as shown in Figure 1.  
Thread pipe nipples into stems as shown. Note: There are generally (2 or 3) 12" stems and (1) 6" stem included. Attach a minimum of 1 stem. and additionally, as many of the remaining stems as desired.
6. Attach first stem to swivel located at bottom of canopy.
7. Couplings (If included are typically added between the lower stems. The couplings are optional may be in any location between the stems.
8. Attach last stem to fixture socket assembly and carefully pull excess wires through canopy.
9. Follow enclosed Stem Hung Pendant Fixture Installation and Wiring Instruction.
10. Install the bulbs in accordance with the fixture's specifications.  
**(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**  
**(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

## MOUNTING THE FIXTURE (Fig. 1)

11. Attach the mounting bar (A) to the outlet box using the outlet box screws (C). The side of the cross bar marked "GND" must face out.
12. Attach the fixture body onto the mounting bar (A) by protruding 2 mounting screws (B) through the mounting holes of the canopy (D) and secure with ball nuts (E).

## CONNECTING THE WIRES (Fig. 2)

1. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the ground wire from the fixture to it. Otherwise, connect the fixture's ground wire directly to the cross bar using the green screw provided.
2. After wires are connected, tuck them carefully into the ceiling junction box.

Your installation is now complete. Return power to the outlet box and test the fixture.

**Fig.1**

Mounting plate

Ground Screw

Mounting Screw(2)

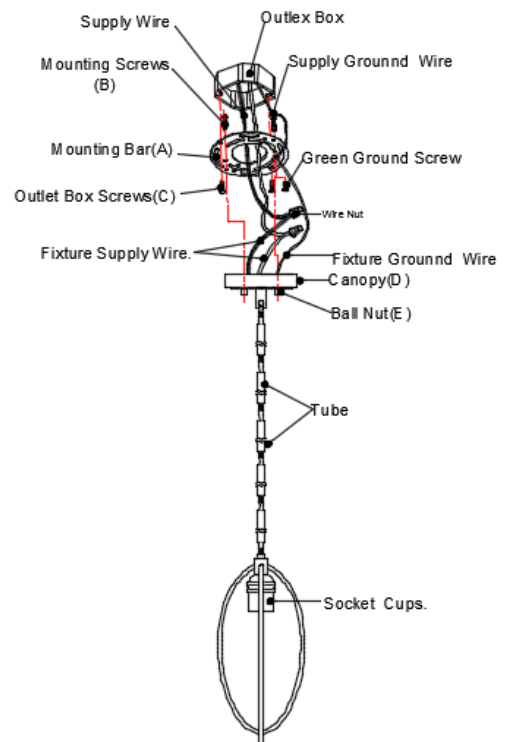


Fig. 2

|                                  |                                  |                                       |
|----------------------------------|----------------------------------|---------------------------------------|
| FIXTURE WIRES<br>Black or Smooth | FIXTURE WIRES<br>White or Ribbed | FIXTURE WIRES<br>Bare Copper (Ground) |
|                                  |                                  |                                       |
| HOUSE WIRES<br>Black (Hot)       | HOUSE WIRES<br>White (Neutral)   | HOUSE WIRES<br>Green (Ground)         |

