


KLOUT™

FP3070** 22" Ceiling Fan

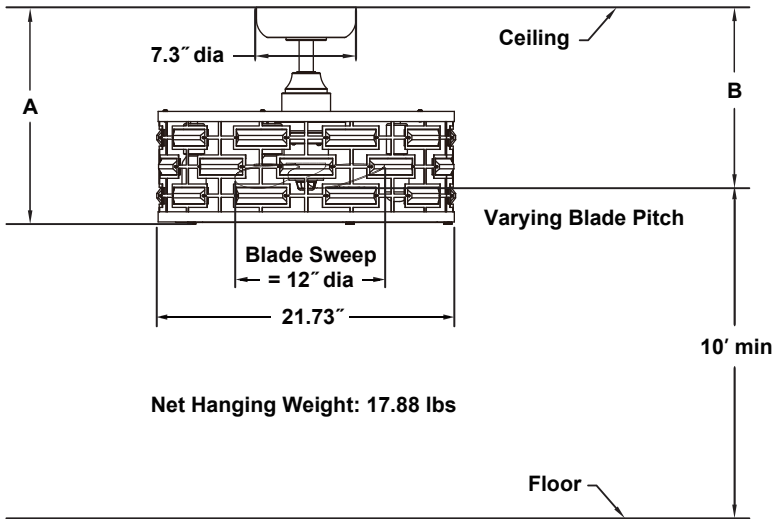

	A	B
Fan w/4.5" downrod	15.99"	13.37"
Fan w/12" downrod	23.49"	20.87"
Fan w/18" downrod	29.49"	26.87"
Fan w/24" downrod	35.49"	32.87"
Fan w/36" downrod	47.49"	44.87"
Fan w/48" downrod	59.49"	56.87"
Fan w/60" downrod	71.49"	68.87"
Fan w/72" downrod	83.49"	80.87"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

79.5 x 64 AC motor is designed for optimal performance with this fan.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC2WH and WR501WH wall controls, BTCR9 hand held remote control, BTR9 receiver unit and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Five 6-watt T45 dimmable LED bulbs included.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 20°. Most sloped ceiling installations require a standard 4.5" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only. This fan is for room up to 100 sq ft.

Available Finishes

BS	Brushed Satin Brass with Clear Blade
CH	Chrome with Brushed Nickel Cage with Clear Blade

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1196	891	35	0.21	26
Med	927	725	37	0.19	19
Low	622	508	40	0.16	13

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
20	711	6	35

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	6	5	2500	2700	90%